


# FOLD 10 | WALL LIGHT | GALVANIZED

2019041031

**nordlux®**

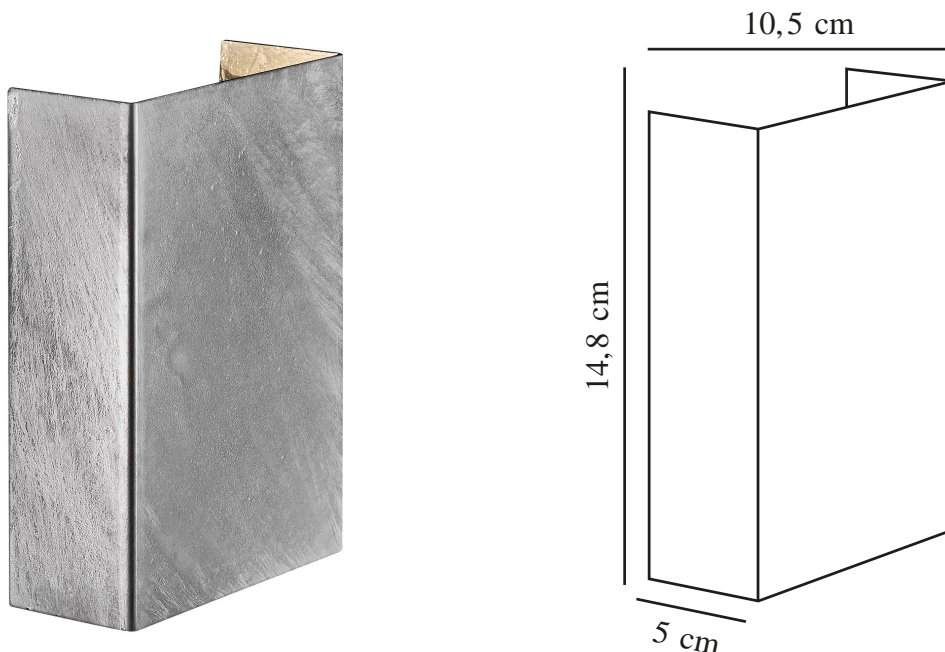

Voltage (V): 230 Volt

IP degree: IP54

Class (Class 1, Class 2, Class 3):

Class 1 (Earth contact)

Socket type: LED – Non-replaceable light source

Parallel connection: True

Primary material: Galvanized steel

Secondary material: Plastic

Colour of the glass - Hidden: Clear

Suitable for Seaside: True

Colour: Galvanized

Height (cm) : 14.9

Width (cm): 10.6

Projection (cm): 4.5

EAN: 5704924000553

TUN: 2085840

Item Number: 2019041031

Pcs Per Master Carton: 3

Sales Box Height (cm): 16

Sales Box Width (cm): 6

Sales Box Depth (cm): 11.5

Sales Box Volume m³ : 0.0011

Product net weight (kg): 0.86

Brightness of light (Lumen): 225

Colour temperature (Kelvin): 3000

Ra-value : 80

Lifetime (hours): 25000

Beam angle (°) : 120

Energy class: F

Actual watt (W): 7.5

- Four light effects included • Built-in parallel connection • Designed for both outdoor and bathroom use
- Extra durable material suitable for coastal areas (Designed For Seaside) • 15-year

"Fold a sheet of paper, place a bulb behind - and you have a lamp." Although the reality is not that simple, designer Henrik Bønnelycke wants the light to appear as if it is. In terms of shape, Fold is brightly clear, where the selected details and latest LED technology are in focus. The magnetic shade makes the installation simple and the design distinct without visible screws. The light shines up and down, and the four included light patterns change the light based on desire and personal style and are also an element for light dimming.

This lamp is a 10 cm wide miniature version of our traditional Fold lamp which creates new applications. Use Fold in galvanized steel as orientation light at the lower part of the wall or as a beautiful illuminating piece of art in the bathroom or the hallway.

[www.nordlux.com](http://www.nordlux.com)

This product is part of our "Designed For Seaside" range, crafted from extra durable materials to withstand even the harshest coastal weather conditions.

