


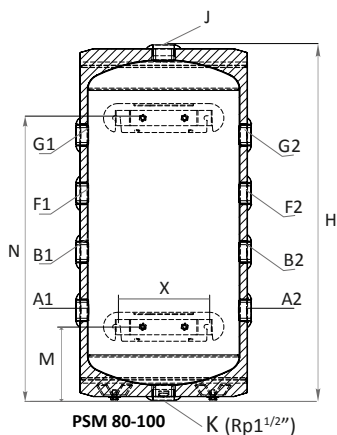
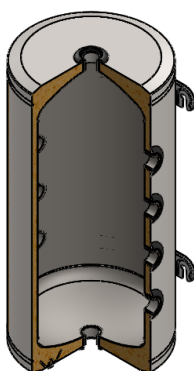


7. Model PSM - without coil /30 L - 100 L/

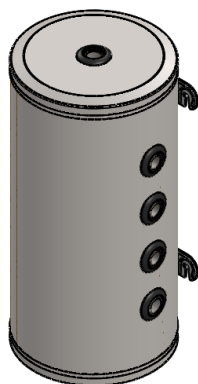

		PSM 30	PSM 50	PSM 80	PSM 100
Capacity	L	30	50	80	100
Height without feet	H, mm	360	520	755	915
Diameter with insulation	D, mm	Ø 440	Ø 440	Ø 440	Ø 440
Operating pressure/Max. buffer temperature	bar/°C	6/95	6/95	6/95	6/95
Recommended boiler size, connected to buffer tank	kW	1-4	3-5	6-10	6-10
Weight	kg,	13	17	25	29
Connection	A1,A2 mm, Rp1 1/2"	180	170	190	230
Connection	B1,B2 mm, Rp1 1/2"	-	355	315	380
Connection	F1,F2 mm, Rp1 1/2"	-	-	440	535
Connection	G1,G2 mm, Rp1 1/2"	-	-	570	690
Connection	J, mm, Rp1 1/2"	360	520	755	915
Connection	K mm, Rp1 1/2"	Rp1 1/2"	Rp1 1/2"	Rp1 1/2"	Rp1 1/2"
Dimensions	M, mm	210	370	165	165
Dimensions	N, mm	-	-	605	765
Distance between suspension holes of the wall mount	X, mm,	240	240	240	240