

SAMSUNG


Cascade Controller



Increased flexibility and seamless adaptation

The EHS Cascade solution¹ can control up to eight EHS units² operating simultaneously for increased flexibility and seamless adaptation to heating and domestic hot water demands.

The EHS Cascade Controller starts the unit with the lowest runtime and stops the unit with the highest one. In this way, it helps to balance usage and optimise efficiency across the system. The perfect solution for multi-family homes where HVAC loads can fluctuate a lot.

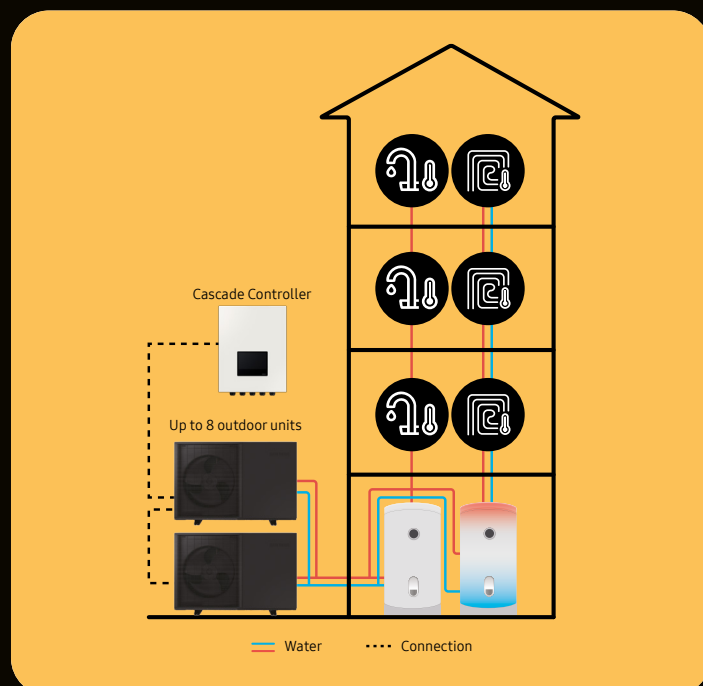

Improved efficiency

The EHS Cascade Controller offers improved efficiency. It continuously monitors the demand for heating and domestic hot water and adjusts the operation of the EHS units accordingly. This ensures that the correct number of units are running to serve actual needs and prevents underuse or overloading. In addition, the units keep operating in their high-performance range.



User-friendly design

The Cascade Controller and Control Kit share a uniform, professional design and can be tailored to suit specific purposes. The Cascade Controller offers a 7" display, for a comprehensive overview of the Cascade System and effortless monitoring and management.

Seamless integration

The Cascade Controller supports Modbus for seamless integration with other control systems. It is also compatible with EHS Cloud⁵ and SmartThings⁶ on firmware version '25.1Q.


AI Home

A large, user-friendly display³ provides the user with a quick status of all devices within the Cascade System⁴. The interface provides insights into heating and energy usage for effortless system management. Key operational details can be monitored at a glance, including unit operation count, zone control status, operation modes, water temperature, and more. All connected outdoor unit information is displayed on a single screen, providing a comprehensive overview for monitoring the connected units.

Easy management

Registering the Cascade Controller as a SmartThings⁹ device, enables users to manage connected outdoor units conveniently and effortlessly. Each outdoor unit uses individual Wi-Fi for OTN communication, for smooth data transmission. R1/R2 and F1/F2 connections enable the controller to seamlessly send and receive OTN information. This enables centralised monitoring and makes system management simpler.

Size

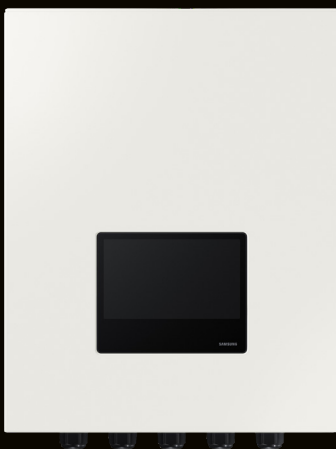

Compact sizing

Width: 380mm

Height: 480mm

Depth: 150mm

Scalable performance

The system supports a maximum capacity of 128kW, ensuring optimal performance for various applications. Up to eight outdoor units from the same model category⁷ can be connected for seamless scalability and reliability.

For example:

- R290 Mono 16kW x 8 sets = 128 kW

- R32 HT Quiet 14kW x 4 sets + 8kW x 2 sets = 72 kW

Stable load supply

The Cascade System continues to ensure a stable heat supply even if there is an issue with one of the units. In that case, the system automatically transmits an alert to the Cascade Controller and isolates the affected unit. The remaining units continue operation, uninterrupted. This reduces downtime and ensures a consistent heat supply.

Excellent part-load operation

The Cascade System offers excellent part-load operation, adapting seamlessly to peak demand by operating from 100% to at least 2,5%⁸ of the peak load. It provides a stable and reliable load supply, making it ideal for locations with high HVAC load fluctuations, like multi-family homes.



Registering the Cascade Controller as a SmartThings⁹ device, enables users to manage connected outdoor units conveniently and effortlessly.

Compatible products:

Outdoor Units



Model


AE***RXVD**

AE***BXVD**

AE***CXVD**

AE***CXVB**

Indoor Units

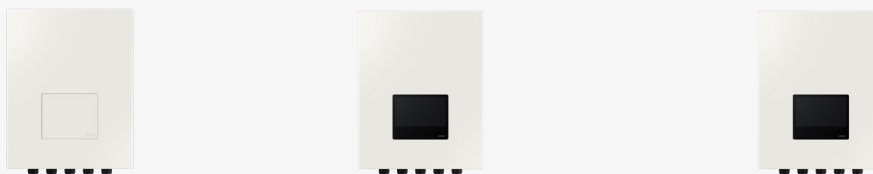

Model

MIM-E03GN

MCM-D3E0N

MCM-D3E0N

- [Support EHS Line-up]: 1. R32 Mono HT Quiet + Control KIT; 2. R290 Mono + Control KIT; 3. R290 Mono with Pump; 4. R32 Mono + Control KIT.
- ClimateHub and Hydro unit are not supported.
- For full functionality Wi-Fi connection and Samsung account required. Use a separate laptop/computer to create a Samsung Account.
- All the appliances must be connected to the SmartThings App via a Wi-Fi connection using the same Samsung account.
- Wi-Fi connection and Samsung SmartThings application account are required. Wi-Fi Kit to be ordered separately. Requires iOS 10.0 or later & Android 5.0 or later.
- EHS Cloud Service is available for compatible Samsung products only, further terms and conditions apply. A separate Wi-Fi kit may be required for the EHS unit.
- Applicable models for Cascade system
 - R32 Mono (AE***RXVD**)
 - R32 HT QUIET (AE***BXVD**)
 - R290 Mono (AE***CXVD**)
 - R290 Mono with pump (AE***CXVB**) → No need to MIM-E03GN
- Connected eight outdoor units.
- Wi-Fi connection and Samsung SmartThings application account are required. Wi-Fi Kit to be ordered separately. Requires iOS 10.0 or later & Android 5.0 or later.

SAMSUNG



Model Name				Cascade Controller		Control Kit			
Item Code				MCM-D3E0N		MIM-E03GN			
Item	Power Supply			Φ, #, V, Hz	1,2,220-240,50		1,2,220-240,50		
	Outdoor Unit Connection			-	2 - 8		×		
	Casing	Color		-	Greige		Greige		
		Material		-	PCM		PCM		
	Packing	Material		-	EPS/BOX		EPS/BOX		
	External Dimension	Net Weight		kg	7.1		6.7		
		Shipping Weight		kg	11.0		10.6		
		Net Dimensions (WxHxD)		mm	380 x 480 x 150		380 x 480 x 150		
		Shipping Dimensions (WxHxD)		mm	445 x 605 x 250		445 x 605 x 250		
	External Control	Water Pump(1st)		Output	-	AC 230V, 2EA, FIXED		AC 230V (Max 1A), 1EA, INV	
		Water Pump(2nd)		Output	-	AC 230V, 1EA, FIXED		×	
		Water Pump for 2 Zone(Fixed)		Output	-	AC 230V		×	
		Booster Heater		Output	-	AC 230V		×	
		Backup Heater(Add)		Output	-	AC 230V		AC 230V (Max 300mA)	
		Backup Boiler		Output	-	AC 230V		×	
		Valves, 2 or 3way		Output	-	AC 230V		AC 230V (Max 50mA)	
		Solar Pump		Input	-	AC 230V		×	
		Room Thermostat		Input	-	×		×	
		Flow Sensor		Input	-	×		Provided by Samsung	
		Mixing valve		Output	-	AC 230V (Max 50mA)		AC 230V (Max 50mA)	
		Thermistor		Input	-	Provided by Samsung (7EA)		×	
		Function	Wi-Fi Embedded		-	•		×	
	Single Wi-Fi Kit		-	×		•			
	EHS Cloud		-	•		•			
	7 inch Full touch display		-	•		×			
	Energy Monitoring		-	•		×			
	PV / SG Ready		-	•		×			
	2 Zone Control		-	•		×			
	Certification	SAFETY		-	•		•		
		EMC		-	•		•		
	Cascade Function	Away mode		-	•		×		
		Silent Mode		-	•		×		
		Initial Start-up Control		-	•		×		
		I Control (Time Control)		-	•		×		
		Backup Boiler	Outside air	-	•		×		
			Heating up	-	•		×		
		PV Linkage Hz Control		-	•		×		
		Energy Measurement	Individual	-	•		×		
			Integrated	-	•		×		
		Secondary Circulation Pump Control		-	•		×		
		Schedule Control		-	•		×		
		Simultaneous Heating / Water Supply		-	•		×		
		Defrosting Control		-	•		×		

SAMSUNG

Find your flow.

Learn more about Samsung Climate Solutions at:
samsung-climatesolutions.com

Copyright © 2025 Samsung Electronics Air Conditioner Europe B.V. All rights reserved. Samsung is a registered trademark of Samsung Electronics Co., Ltd. Specifications and designs are subject to change without notice and may include preliminary information. Non-metric weights and measurements are approximate. All data was deemed correct at the time of creation. Samsung is not liable for errors or omissions. Some images may be digitally altered. All brand, product, service names and logos are trademarks and/or registered trademarks of their respective owners and are hereby recognised and acknowledged.



Samsung Electronics Co., Ltd. participates in the Eurovent Certification Programme (ECP) for Air Conditioners (AC), Variable Refrigerant Flow (VRF) and Liquid Chilling Packages Heat Pump (LCP-HP). To check the ongoing validity of certification, please visit: www.eurovent-certification.com

Samsung Electronics Air Conditioner Europe B.V.

Evert van de Beekstraat 310, 1118 CX Schiphol

P.O. Box 75810, 1118 ZZ Schiphol

+31 (0)8 81 41 61 00

The Netherlands